

### 6.1.4 Bauwerk Villapark (2100 × 190 × 9.5 mm)



#### Application area and specific product characteristics

The large strips give the room a decisive character. Available with a natural or brushed finish, with bevelled edges, oiled and stained in attractive, trendy shades

#### Construction

- › Two solid layers bonded together
- › Top layer made in solid wood
- › With two or four bevelled sides
- › Lower layer in HGF, resistant and extremely stable - an excellent support
- › All of the floor boards have a highly precise tongue and groove

#### Laying patterns to choose from (see chapter 2.2.5)

- › Shipdeck
- › English

#### Top layer thickness

- › 2.5 mm

#### Surface treatment

- › Treated with the UV-light cured hard-wearing oil. Variation: Dyed
- › Lacquered with UV-hardened high-strength sealant. The acrylic lacquer is solvent and formaldehyde-free and very wear resistant. The polished finish is matt.

#### Subfloor requirements

The subfloor must be dry, clean, level and solid. See our subfloor requirements in Chapter 7 and the Bauwerk laying instructions in Section 8.1

#### Installation

The floor is bonded to the supporting subfloor with the appropriate adhesives (see the table of recommended adhesives).

#### Attachment to walls and baseboards

Optimum attachment to the wall with perfectly suitable baseboards.

#### Floor heating and heat transmission resistance

Villapark is suitable for installation with underfloor radiant heating systems (see Section 7.2). Heat transmission resistance approx. 0.049 m<sup>2</sup> K/W

**Fire class:** C<sub>fl</sub>-s1 (for details see table in chapter 15)

**Slip class:** nature oiled: GS3, R10, USRV 74, class 1  
matt sealed: GS2, R9, USRV 29, class 2

#### Cleaning and maintenance


Vacuum or clean the floor with a moistened, well wrung out cloth as needed. Too much water will damage the floor. Always use Bauwerk products and accessories for cleaning and maintenance

#### Packaging

- › Cardboard box made from 100% recycled paper
- › Polythene sheet to protect from moisture

#### Product range

See our sales brochures for detailed information about our range of products.

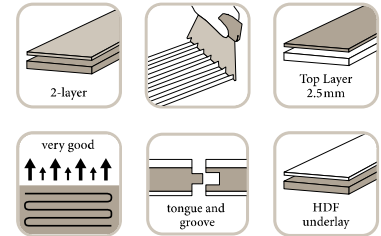

PACKING UNIT:  
2.40 m<sup>2</sup> × 45 = 108 m<sup>2</sup>

*See Chapter 11 for information about parquet cleaning and maintenance*